




iPhone 4S Upper Antenna Replacement

Internal prerequisite when front facing camera is removed.

Written By: Walter Galan

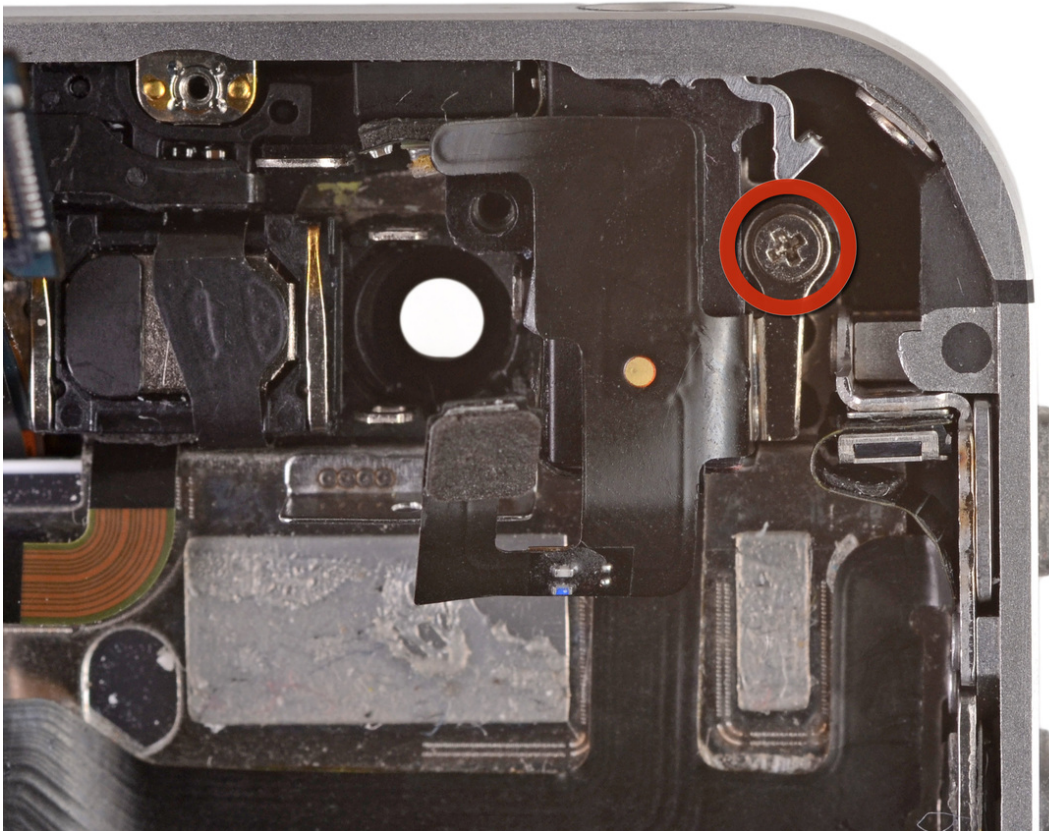

INTRODUCTION


Internal prerequisite when front facing camera is removed.



TOOLS:



- [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Upper Antenna

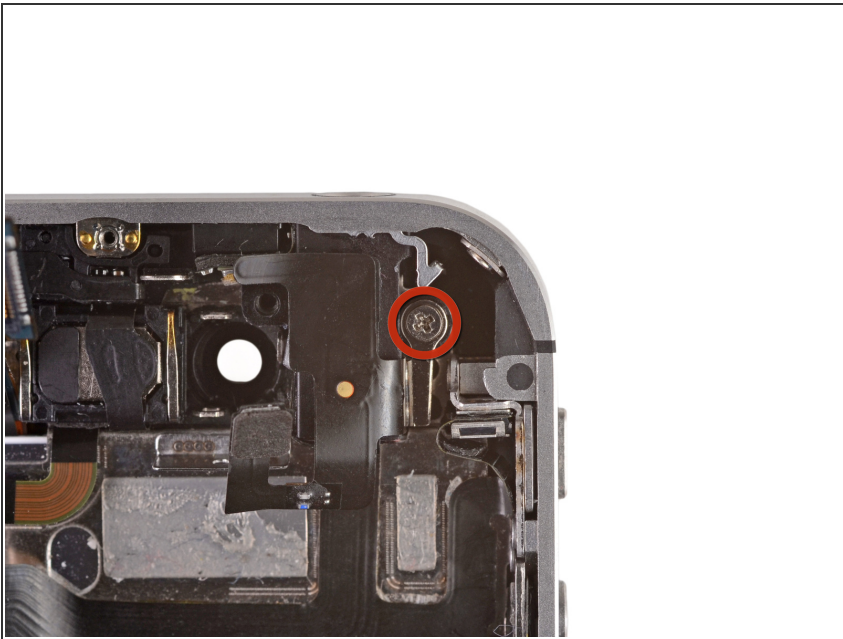


- Remove the 2.4 mm Phillips screw next to the headphone jack.

Step 2

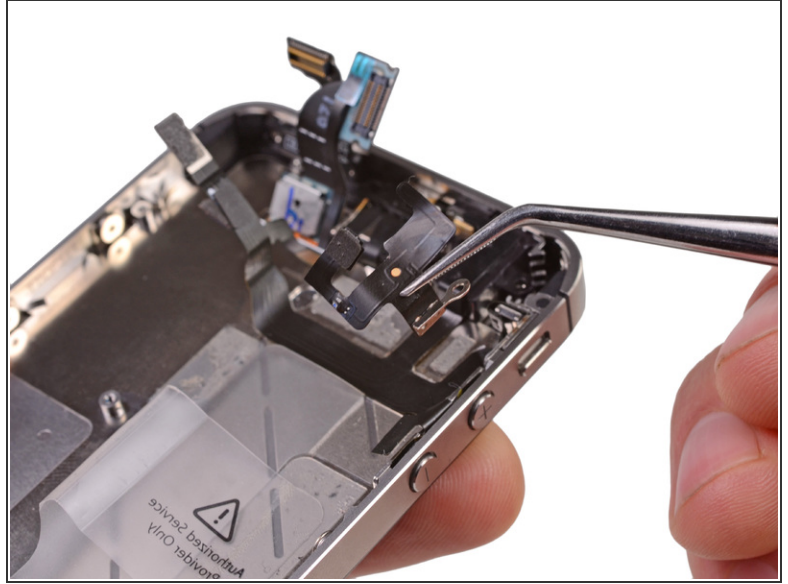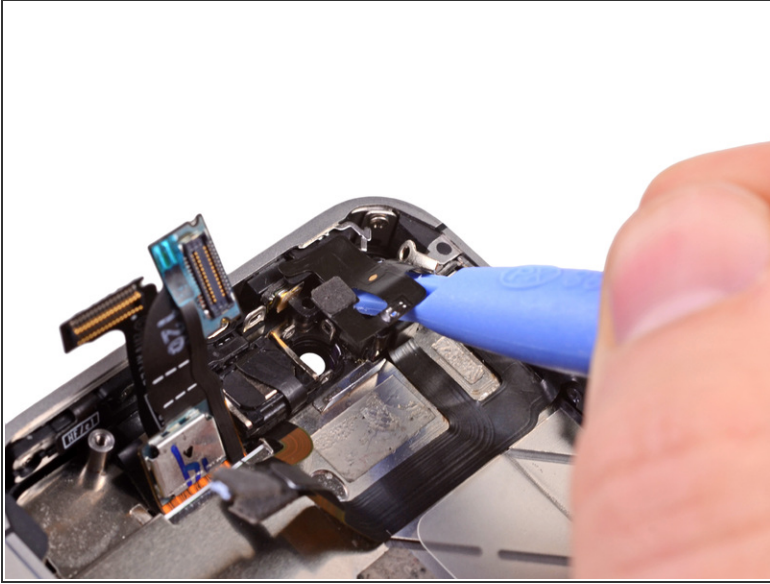

- Use the edge of a plastic opening tool to peel the upper antenna off the headphone jack.
- Use a pair of tweezers to remove the upper antenna from the iPhone.

 Before reassembly, be sure to clean the metal-to-metal contact point on the upper antenna (**not** the mating halves of its connector) with a de-greaser such as windex or isopropyl alcohol. The oils on your fingers have the potential to cause wireless interference issues.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-19 07:27:47 PM.